



**808 Luxury ADA Plaza  
Prototype**

**Trailer Specifications // Standard Equipment**

Unibody Steel Frame 8' x 8'  
Steel Corners for Side Wall Support  
Side Wall Mounted A/C Unit  
Entrance / Exit Door (1)  
Door Trim Package  
Rain Gutter over Door  
Laminate Interior Walls – Alabaster  
Jacobean Wood Trim Package  
All Walls and Ceiling Insulated  
Steel Subflooring with 3/4" Marine Grade Plywood T / G Floor  
Macerator Assembly for Black and Gray Waste

Five Year Warranty Steel Frame  
Rubber Sealed Undercoating  
Lockable Thermostat  
36" Commercial Steel Door  
Aluminum Kick Plates  
Occupants Indicator Door Lock  
Enduralite Smooth Finish Ceiling  
Rear Mount Ventilation Fan  
Belted Rail Framed Wall Structure  
30 amp 110 volt Electrical Connection  
1" Discharge to Exterior Tank

Frame has Integrated Steel Fork Lift Tubes  
Connection  
Aluminum Exterior Siding, Trim and Doors – Chevy Green  
Patented ADA Ramp

3/4" Fresh Water  
Vinyl Flooring – Burlap

**ADA Unisex Accommodations**


ADA China Flushing Macerator Toilet  
Solid Surface Sink Top – Walnut Toffee  
Electric Hands Free Delta Faucet  
ADA Door Handle and Locking System  
ADA Wall Rails

Stainless Sanitary Receptacle  
Drop-In Sink – Biscuit  
Framed Glass Mirror with Soffit Lights  
ADA Door Closure

**Price: \$9,940.00**



Drawing not to scale.

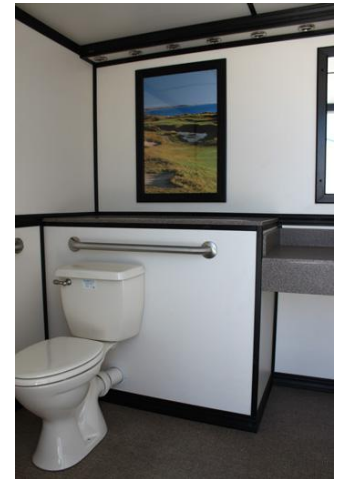

**Please Note**

This unit is without axles and wheels. It is transportable by a flatbed trailer (not included) and maneuvered into place by fork truck(s). It is not designed as a permanent building as it is built to codes specific to portable structures. If use as a permanent building is planned, please consult local authorities to determine conformity to codes applicable for such use.

This 808 ADA Plaza is a prototype model being offered at a "demo" price. It features many luxury appointments and provides for unisex as well as ADA compliant use. There is no waste tank. Gray and black water discharge is by means of a macerator assembly which pumps the waste to any external tank or disposal point. Choice of side or front facing ramp assembly which is included. The door way is approximately four inches above ground level and the ramp is required. Ramp is also fully ADA compliant.

Very luxurious and very functional. This unit is the production prototype and has been designed for use at PGA Golf venues to be located in VIP temporary structures. Production models will be larger and feature two rooms. This working prototype was produced specifically to trial-test the process of placing the unit inside a tented structure. It has not been used. It can be used in a variety of locations and venues.

**Since 1988 America's Premier Specialty Trailer Manufacturer**